



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name in which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Andrew Jones*

Dated 20 August 2001

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference NMM/P403173GB

2. Patent application number
(The Patent Office will fill in this part) **0015815.4** 29 JUN 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames) **WILLIAM RONALD GREENWOOD**
The Mount,
Park Road,
Tarporeley,
Cheshire CW6 0AN
 Patents ADP number (if you know it) 5916804001
 If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention POLO TRAINING APPARATUS

5. Name of your agent (if you have one) **W. P. THOMPSON & Co.**
Coopers Building,
Church Street,
Liverpool
L1 3AB
 "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
 Patents ADP number (if you know it) 000158001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

	Country	Priority application number (if you know it)	Date of filing (Day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

	Number of earlier application	Date of filing (Day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'yes' if:

NO

 a) any applicant named in part 3 is not an inventor, or
 b) there is an inventor who is not named as an applicant, or any named applicant is a corporate body. See note (d))

Patents Form 1/77

9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claims(s)	4
Abstract	1
Drawing(s)	5 <i>xyll</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 1

Any other documents
(Please specify)

11. I/We request the grant of a patent on the basis of this application

Signature

Date 28/06/2000

N.M. Manley

12. Name and daytime telephone number of person to contact in the United Kingdom N.M. MANLEY
0151 709 3961

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*

DESCRIPTIONPOLO TRAINING APPARATUS

At present, the opportunities for practising polo other than in a polo match are limited. One option is for a player to ride a polo pony and to hit a series of series of balls across a field. Whilst such practice is very effective, it is a relatively expensive option and requires the use of a large area. Moreover, there is a problem with positioning the practice balls and in retrieving them once they have been hit.

The second option is for a player to sit astride a dummy horse and to hit a series of balls located on the floor. Whilst this can be done in a much smaller area, the fact that the dummy horse is stationary means that relatively few balls can be lined up ready to be hit. Moreover, the practice which this option affords is not particularly realistic.

It is an object of the present invention to provide a polo training apparatus which overcomes or alleviates the problems associated with the prior art.

In accordance with a first aspect of the present invention, a polo training apparatus comprises a dummy horse and at least one ball-locating surface located adjacent to and below the dummy horse, the ball-receiving surface being displaceable relative to the dummy horse.

Preferably, the or each ball-receiving surface is located to one side of the dummy horse and preferably is arranged to move in a direction parallel to the fore/aft direction of the dummy horse.

In this way, a ball located on the ball-receiving surface will be

displaced relative to the dummy horse, thereby simulating the movement of the horse relative to the ground and to the ball.

Preferably, the apparatus comprises a plurality of displaceable ball-receiving surfaces.

In a preferred embodiment, a ball-receiving surface is provided on each side of the dummy horse.

Preferably, the or each movable surface comprises an endless conveyor belt.

In one preferred embodiment, the dummy horse is itself displaceable, e.g. reciprocable, preferably to simulate the action of a moving horse. Preferably, the speed of the horse is linked to the speed of the or each ball-receiving surface, whereby an increase in the speed of one increases the speed of the other. In this way, a very realistic action can be achieved in which the induced motion of the dummy horse corresponds with an increased speed of the ball-receiving surface.

Preferably, the dummy horse and the or each moving surface are displaced by the same means, e.g. an electric motor.

The apparatus may further comprise one or more inclined surfaces adjacent to the or each moving surface, whereby a ball which has been hit off the moving surface is encouraged to return to the surface, where it can be hit again. The apparatus may further comprise a peripheral enclosure, e.g. a cage or net, to prevent balls from inadvertently being hit out of the apparatus.

In accordance with a second aspect of the present invention, a polo

training apparatus comprises a dummy horse having a substantially rigid frame and a body portion pivotally mounted on the frame, whereby the body portion can be pivoted from side to side.

The side to side pivoting of the body portion of the dummy horse simulates more closely the movement of a rider and horse as a ball is hit.

Preferably, the body portion is biased (e.g. by means of springs) whereby the body portion can be displaced to either side against a restoring force. In one embodiment, the apparatus further comprises a sensor adapted to detect pressure from one or more parts of the rider's body. For example, the apparatus may comprise a sensor to detect pressure applied by one or both knees or feet of the rider. There may also be display means, e.g. a light, which indicates to a rider when correct pressure is applied, and therefore the correct posture is assumed, for a particular shot.

In accordance with a third aspect of the present invention, a horse riding training apparatus comprises a movable body portion upon which a rider sits and means for displacing the body portion, the apparatus further comprising sensor means responsive to a simulated riding action in order to control the apparatus.

In one embodiment, the apparatus comprises pressure sensors adapted to respond to pressure from a particular part of the rider's body, for example the rider's feet, knees or hand. In this way, the apparatus can be arranged such that application of a sharp pressure to sensors on either side of the body results in commencement of the movement of the body portion and further application of pressure to those areas causes an increase in the speed of movement of the body

portion.

In one embodiment, the apparatus further comprises a simulated horse head portion, reins extending from the horse head portion and a control means actuated by movement of the head with the reins.

For example, movement of the head may be arranged to actuate a switch which causes the motion of the horse to slow or stop.

By way of example only, a specific embodiment of the present invention will now be described, with reference to the accompanying drawings, in which:-

Fig. 1 is a perspective view, partly cut-away, of an embodiment of polo training apparatus in accordance with the present invention;

Fig. 2 is a plan view of a portion of the apparatus illustrated in Fig. 1;

Fig. 3 is a side view, partly cut-away, of a portion of the apparatus of Fig. 1;

Fig. 4 is a transverse cross-section through a portion of the apparatus shown in Fig. 1; and

Fig. 5 is a side view, partly cut-away, of a head portion of the apparatus shown in Fig. 1.

Referring firstly to Fig. 1, a polo training apparatus comprises a simulated polo pony 10 (hereinafter referred to as a "dummy horse") located on a base B within and enclosure defined by two end walls 12, 14 and two side walls 16, 18, all of netting or wire mesh. The dummy horse 10 is mounted on a frame 40 (Fig.

3) which is normally surrounded by enclosing walls 20. Conveyor belts 22, 24 are provided one on each side of, and below, the dummy horse, with the upper run of each conveyor generally horizontal and with the direction of motion of the conveyor belts being in the fore/aft direction of the dummy horse, as indicated by arrows M.

Immediately laterally outwardly of the conveyor belts 22, 24 are located upwardly inclined front, rear and side walls 26, 28, 30, 32. A generally horizontal wall 34 is also provided at the top of the rear inclined wall 32.

Two targets 36 are provided on the front wall 12, one to each side of the dummy horse 10. Similar targets 36 are provided on the rear wall 14 and one each on the side walls 16, 18. The targets comprise a pressure-sensitive area at their centre, which is actuated by the impact of a ball, generating a signal. A counter 38 is also provided on the front wall, to count the number of "hits" on the targets 36, as will be explained.

Referring to Figs. 2 to 4, the dummy horse is supported on a fixed metal frame which is mounted on a fixed base wall B. As mentioned earlier, the fixed frame 40 is normally surrounded by enclosing walls 20, but these have been omitted from Fig. 3. A movable frame 42 is movably mounted on the fixed frame 40, as will be explained, and a simulated horse body 44 is mounted on the movable frame 42. A pivotally mounted neck portion 46 extends from the front of the body portion 44 and a pivotally mounted head 48 projects from the distal end of the neck portion 46. The head portion 48 is mounted to the neck portion such that the head pivots in the opposite direction to the neck portion, in the manner described in GB 2,256,597.

The frame 42 and the body portion 44 mounted thereon is displaceable with respect to the fixed frame 40 by means of a motor M mounted on the fixed frame portion. The operation of the motor is under the control of an electronic control unit 50. An eccentric drive 52 is mounted to the output of the motor M which in turn is connected to the movable frame portion 42 via a rigid arm 54 which is rigidly secured to the frame portion 42. A linking bar 56 extends between, and is pivotally mounted to, the moving portion 42 and an upwardly-projecting portion 57 of the fixed frame 40, whereby rotation of the motor M causes the body portion 44 to move cyclically in a motion which simulates that of a galloping horse.

The output of the motor 50 is also fed via a pulley 58, a drive belt 60, a pulley 62 and a further belt and pulley arrangement 64 to a drive shaft 66 to which are connected two rollers 68 around each of which a respective one of the two conveyors 22, 24 is entrained. Thus, operation of the motor M not only induces a simulated a galloping motion in the horse but also causes the conveyor belts 22, 24 to move. Moreover, as the speed of the motor M is increased the speed of the galloping action increases and the speed of the conveyor belts increases accordingly.

With reference to Fig. 4, it will also be noted that the horse body portion 44 is pivotally mounted with respect to the movable frame 42 such that the body portion can pivot from side to side. The body portion is biased to a central position by means of restoring springs 70, 72, connecting the body portion 44 and the movable frame 42.

As best seen in Fig. 5, reins 74 extend from the head portion 48 of the

horse, whereby the head portion can be pivoted downwardly with respect to the neck portion. A rod 76 extends between, and is pivotally mounted to, the head portion 48 and the neck portion 46 and is provided with two rings 78 which, as the head portion is pivotally mounted by means of the reins, actuates a microswitch 80 whose output is connected to the electronic control unit 50 and which is adapted to slow down or, optionally, stop the apparatus.

As seen in Fig. 2, the body portion 44 is also provided with two pressure sensitive knee sensors 80a, 80b, one on either side of the body portion, two pressure sensitive feet sensors 82, one on either side of the body portion, and first and second pressure sensitive areas 84, 86 on the upper part of the neck portion 46, the outputs of these sensors being connected to the motor control unit 50. Manual controls, including an emergency stop switch 88, and faster/slower control buttons 90, 92, are also provided on one side of the body portion, their outputs also being connected to the motor control unit 50. The pressure sensitive panels and manual controls are arranged to control the apparatus, as will be explained. Indicator lights 94, 96 and an LCD speed display panel 98 are also provided on consoles at the front of the dummy horse.

In order to operate the apparatus the rider kicks the two feet sensors 82 simultaneously, which produces a signal causing the control apparatus 50 to start the motor M. Alternatively the faster control button 90 may be depressed or the upper sensor 86 on the neck portion may be pushed. Operation of the motor M induces a simulated galloping motion of the horse body and simultaneously operates

the conveyor belts 22, 24, as described previously. Further simultaneous kicking of the feet sensors 82 (or depression of the faster control button 92 or pushing of the sensor 86) causes an increase in the speed of the motor M. When the motor M is rotating at the desired speed (as indicated by the LCD speed display panel 98), the rider, or an assistant, throws balls towards one or both of the conveyors 22, 24, whereby they will be moved relative to the dummy horse (which is itself moving at a simulated gallop), allowing the rider to hit the balls in a manner similar to that experienced during a real polo match. Moreover, the motion of the horse more closely simulates a game of polo.

When it is desired to take a particular shot, one of the knee sensors 80a, 80b in combination with the lower sensor 84 on the neck portion 46 sense that the rider has assumed the correct posture for a particular shot and one of the indicator lights 94, 96 as appropriate (on the same side as the activated knee sensor 80a, 80b) illuminates in order to confirm this. By leaning to one side, the horse body 44 may be pivoted against the restoring force of the springs 70, 72, which again more closely simulates the action of a real polo pony.

The player then attempts to hit the ball and, if successful, hits one of the targets 36 which are provided with pressure sensors as described previously and which generate a signal whenever the sensor is hit. The counter 38 is arranged to keep a running total of "hits" on the targets.

If the ball is hit forwardly or to one side, it will rebound from the front or side wall 12, 14, 18 and move down the inclined walls 26, 28, 30 towards one of

the conveyor belts 22, 24, where it becomes available for the rider to hit the ball again. This process is repeated until the balls collect at the junction at the rearmost portion of the conveyor belts and the rear inclined wall 32.

Thus, a rider may repeatedly hit a series of balls without having to dismount and without having to retrieve the balls once they have been hit. The simulated movement of the horse and the movement of the conveyors with respect to the horse also greatly enhance the realism, and therefore the effectiveness, of the practice. Moreover, by increasing the speed of the motor M the speed of the galloping motion of the dummy horse is increased correspondingly with the speed of the conveyor belts 22, 24, whereby as the dummy horse "gallops" more quickly, its speed relative to a ball on the conveyor also increases in a manner similar to that which would be experienced on a real horse.

When it is desired to slow down the apparatus, the rider pulls on the reins 74, causing actuation of the microswitch 80 which sends a signal to the motor control unit 50 which causes the motor M to slow down, thereby slowing the movement of the body portion 44 and the conveyors 22, 24. Repeated actuation of the microswitch in this manner eventually causes the apparatus to stop.

The invention is not restricted to the details of the foregoing embodiment.

CLAIMS

1. A polo training apparatus comprising a dummy horse and at least one ball-receiving surface located adjacent to and below the dummy horse, the ball-receiving surface being displaceable relative to the dummy horse.
2. A polo training apparatus as claimed in claim 1, wherein the at least one ball-receiving surface is located to one side of the dummy horse.
3. A polo training apparatus as claimed in claim 1 or claim 2, wherein the at least one ball-receiving surface is displaceable in a direction substantially parallel to the fore/aft direction of the dummy horse.
4. A polo training apparatus as claimed in any of the preceding claims, comprising a plurality of ball-receiving surfaces located adjacent to and below the dummy horse and being displaceable relative to the dummy horse.
5. A polo training apparatus as claimed in claim 4, comprising two ball-receiving surfaces, one located on each side of the dummy horse.
6. A polo training apparatus as claimed in any of the preceding claims, wherein the or each ball-receiving surface comprises one run of an endless conveyor belt.
7. A polo training apparatus as claimed in any of the preceding claims, wherein the dummy horse is displaceable.
8. A polo training apparatus as claimed in claim 7, wherein the dummy horse is movable in a reciprocating motion.
9. A polo training apparatus as claimed in claim 7 or claim 8, wherein

the dummy horse is movable to simulate the movement of a real horse.

10. A polo training apparatus as claimed in any of claims 7 to 9, wherein the speed of movement of the dummy horse is a function of the speed of the ball-receiving surface or vice versa.

11. A polo training apparatus as claimed in claim 10, wherein the speed of the horse and the speed of the ball-receiving surface are directly proportional to one another.

12. A polo training apparatus as claimed in claim 10 or claim 11, wherein the dummy horse and the ball-receiving surface are driven by the same means.

13. A polo training apparatus as claimed in claim 12, wherein the dummy horse and the ball-receiving surface are driven by a common electric motor.

14. A polo training apparatus as claimed in any of the preceding claims, further comprising one or more inclined surfaces adjacent to the or each ball-receiving surface.

15. A polo training apparatus as claimed in any of the preceding claims, comprising a peripheral enclosure.

16. A polo training apparatus as claimed in claim 15, wherein the enclosure comprises a cage or net.

17. A polo training apparatus comprising a dummy horse having a substantially rigid frame and a body portion pivotally mounted on the frame, whereby the body portion can pivoted from side to side.

18. A polo training apparatus as claimed in claim 17, further comprising biasing means for biasing the body portion towards a central position.

19. A polo training apparatus as claimed in claim 18, wherein the biasing means comprise springs.

20. A polo training apparatus as claimed in any of claims 17 to 19, further comprising one or more sensors adapted to detect pressure from one or more parts of the rider's body.

21. A polo training apparatus as claimed in claim 20, comprising sensors adapted to detect pressure from one or more of a rider's feet, knees and hand.

22. A polo training apparatus as claimed in claim 20 or claim 21, further comprising display means to indicate the correct posture is assumed for a particular polo shot.

23. A polo training apparatus as claimed in claim 22, wherein the display means comprises a light.

24. A horse riding training apparatus comprising a movable body portion upon which a rider sits, and means for displacing the body portion, the apparatus further comprising sensor means responsive to a simulated riding action in order to control the apparatus.

25. A horse riding training apparatus as claimed in claim 24, wherein the movable body portion is movable in a reciprocating motion.

26. A horse riding training apparatus as claimed in claim 24 or claim 25, wherein the body portion is movable to simulate the movement of a real horse.

27. A horse riding training apparatus as claimed in any of claims 24 to 26, comprising pressure sensors adapted to respond to pressure from a part of a rider's body.

28. A horse riding training apparatus as claimed in claim 27, comprising sensors adapted to respond to pressure from one or more of a rider's feet, knees or hand.

29. A horse riding training apparatus as claimed in claim 28, comprising pressure sensors adapted to respond to pressure from a rider's feet, wherein actuation of the pressure sensors causes an increase in the speed of movement of the body portion.

30. A horse riding training apparatus as claimed in any of claims 27 to 29, further comprising a simulated horse head portion, reins extending from the horse head portion and a control means actuated by movement of the head with the reins.

31. A horse riding training apparatus as claimed in claim 30, wherein movement of head actuates a switch which, when operated, reduces the speed of the body portion.

32. A polo training apparatus substantially as herein described with reference to, and as illustrated in, the accompanying drawings.

33. A horse riding training apparatus substantially as herein described with reference to, and as illustrated in, the accompanying drawings.

ABSTRACT

POLO TRAINING APPARATUS

A polo training apparatus comprises a dummy horse (10) and conveyor belts (22, 24) arranged one each side of the dummy horse. A ball located on one of the conveyor belts (22, 24) will be displaced relative to the dummy horse (10), thereby simulating the movement of the horse relative to the ground and the ball.

The dummy horse (10) may also be movable to simulate the movement of a horse and the speed of movement of the dummy horse (10) may be linked to the speed of the conveyor belts (22, 24) to simulate the riding of a horse more closely.

(FIG. 1)

Fig. 1

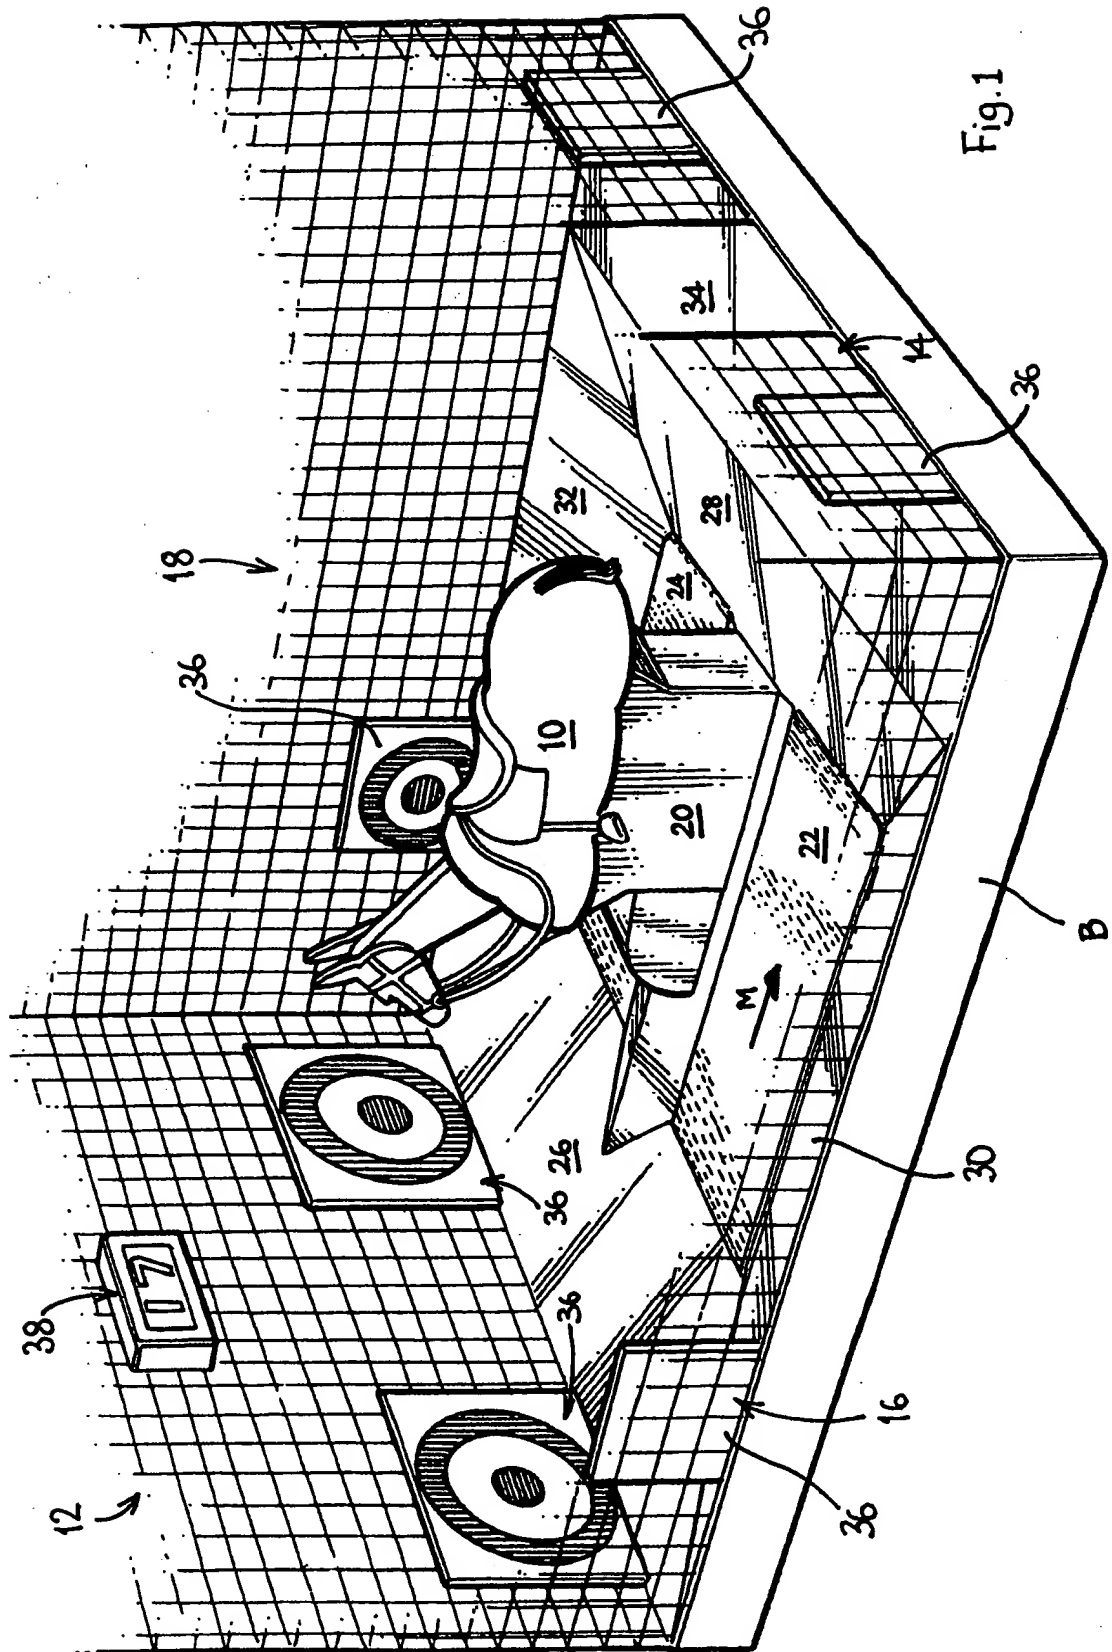
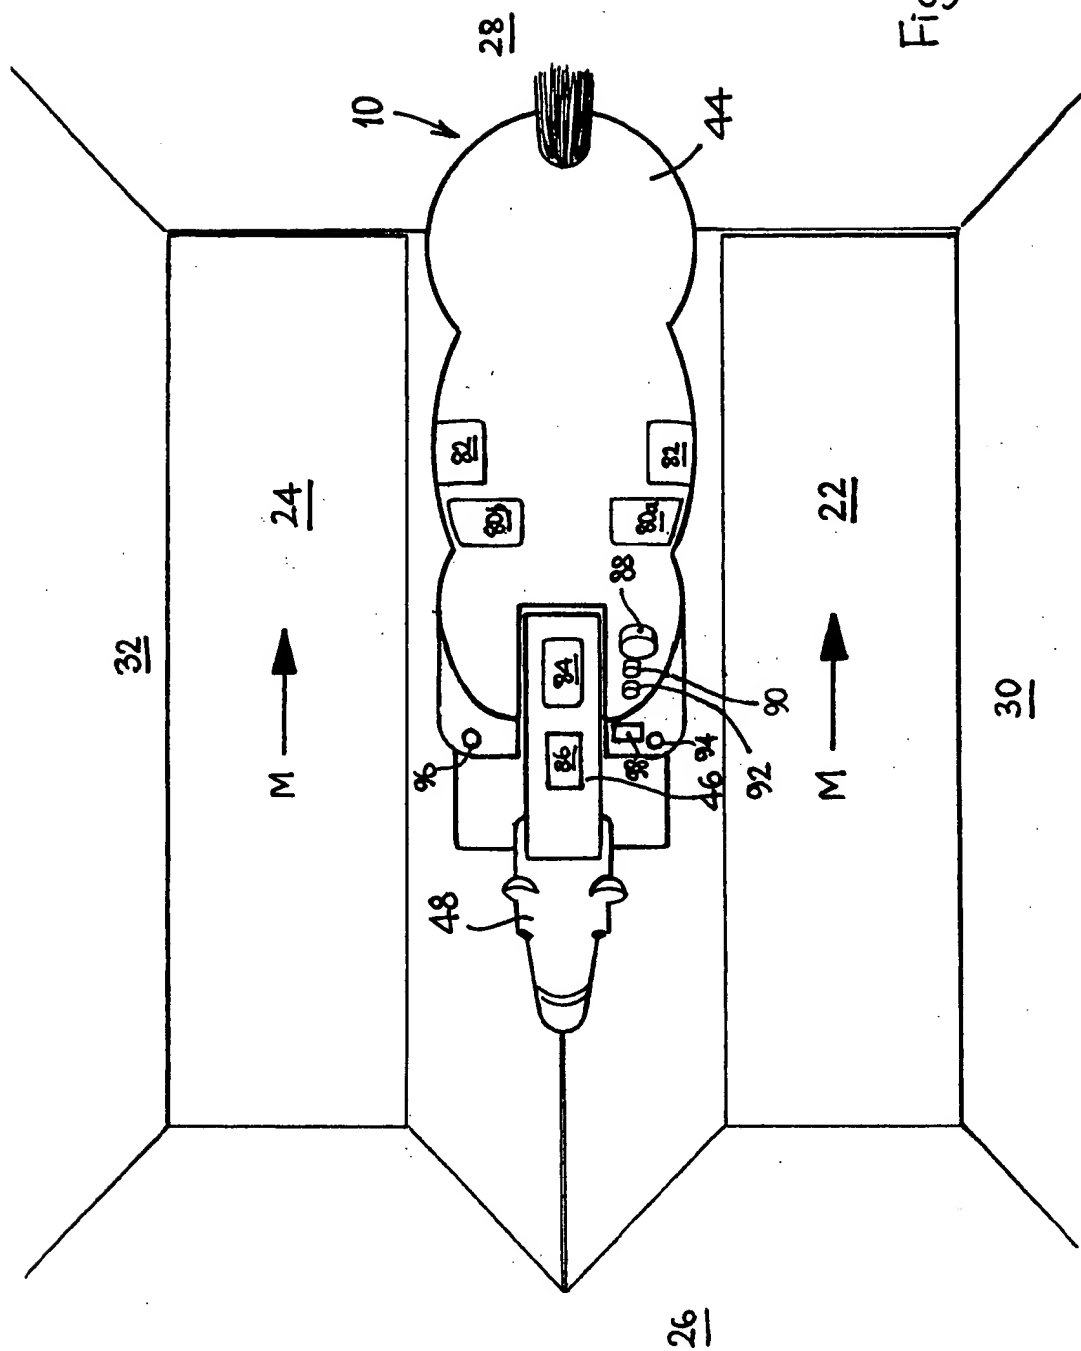
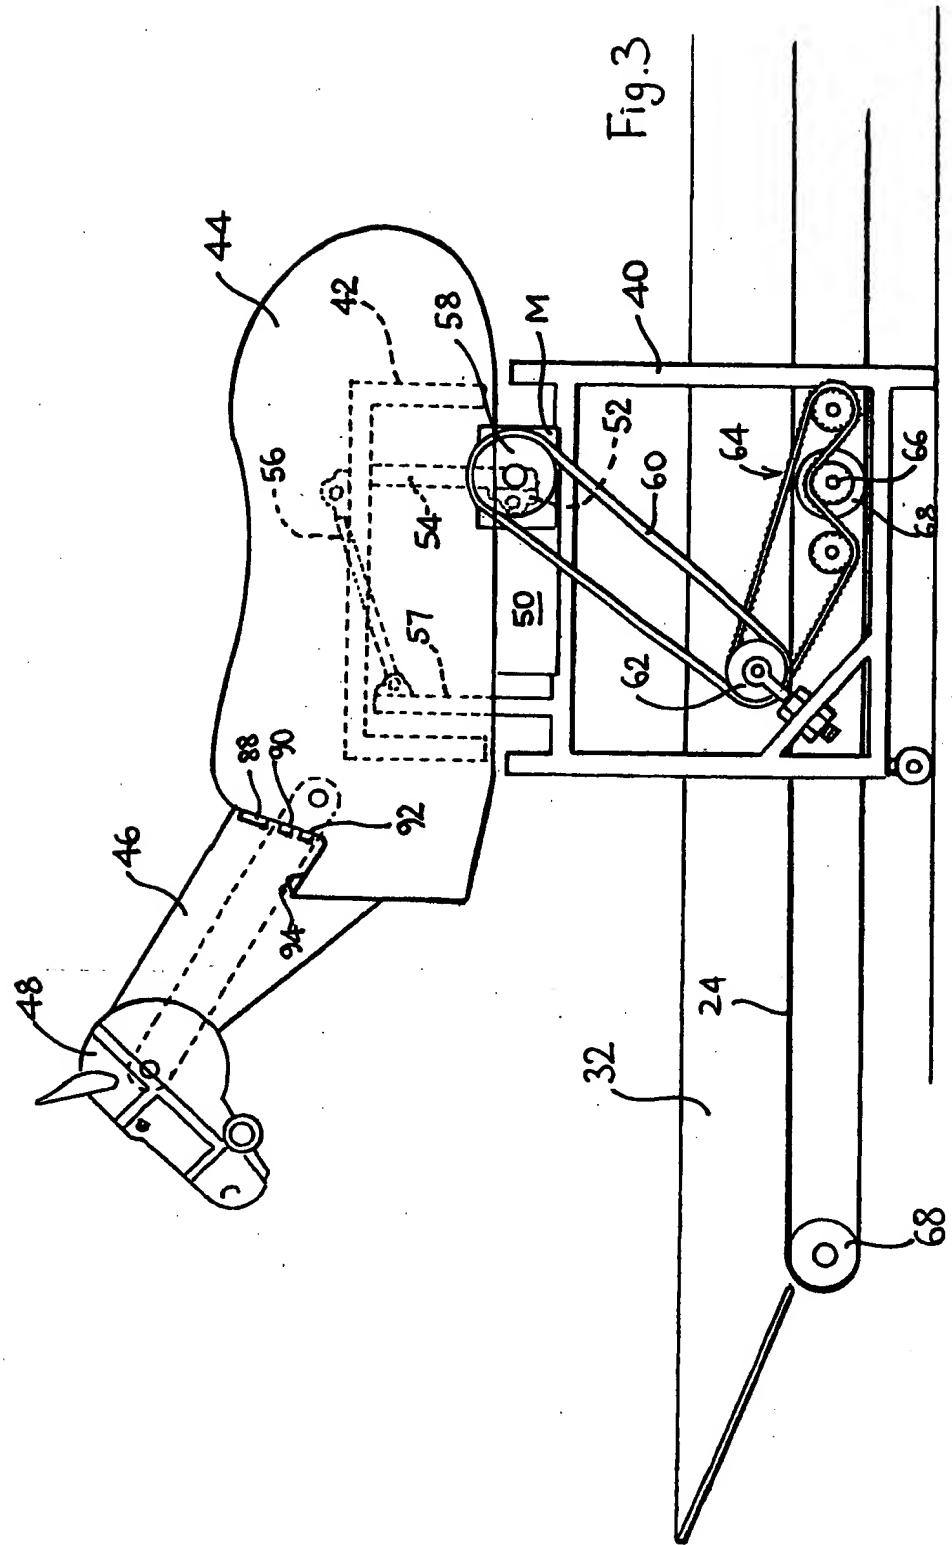
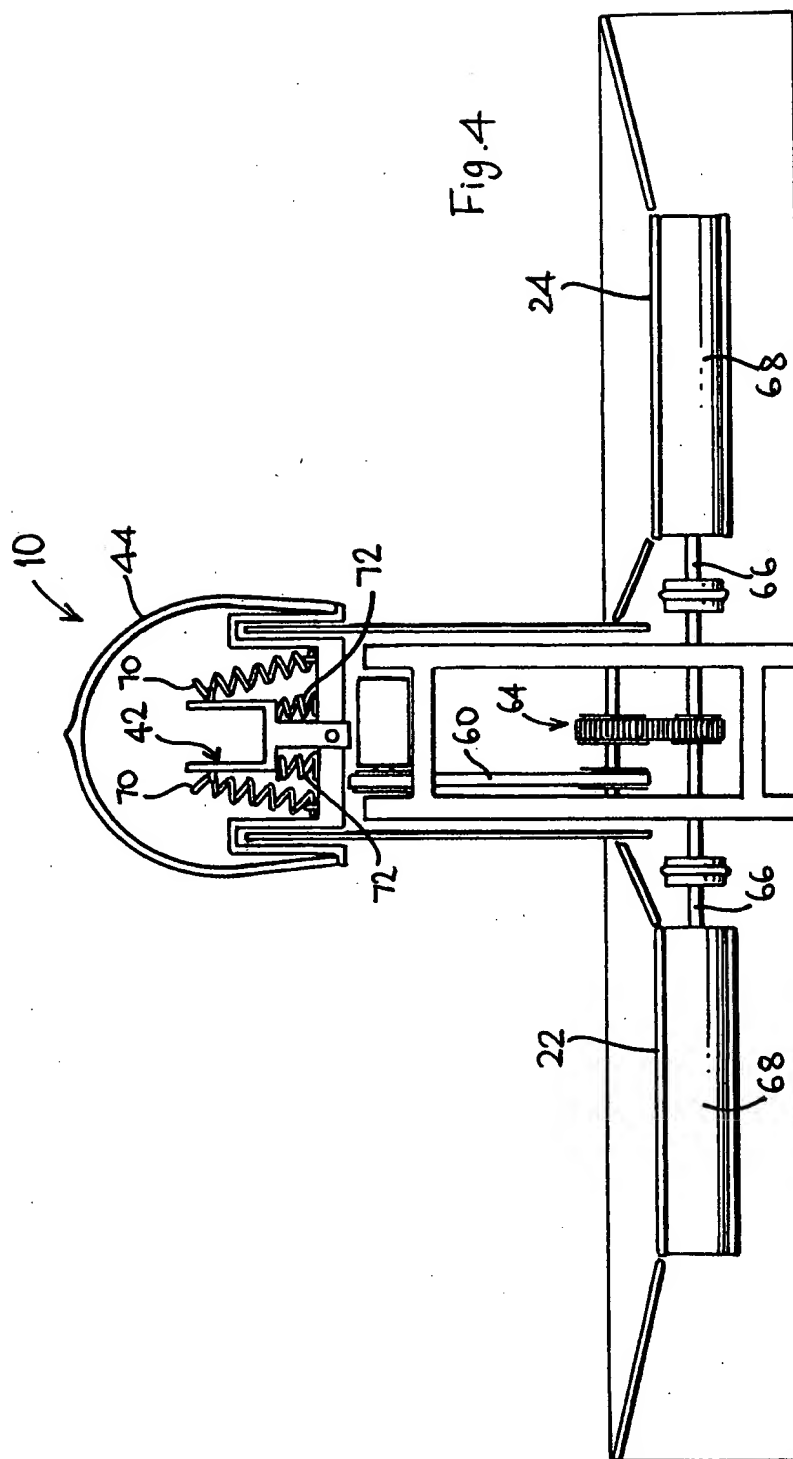


Fig.2







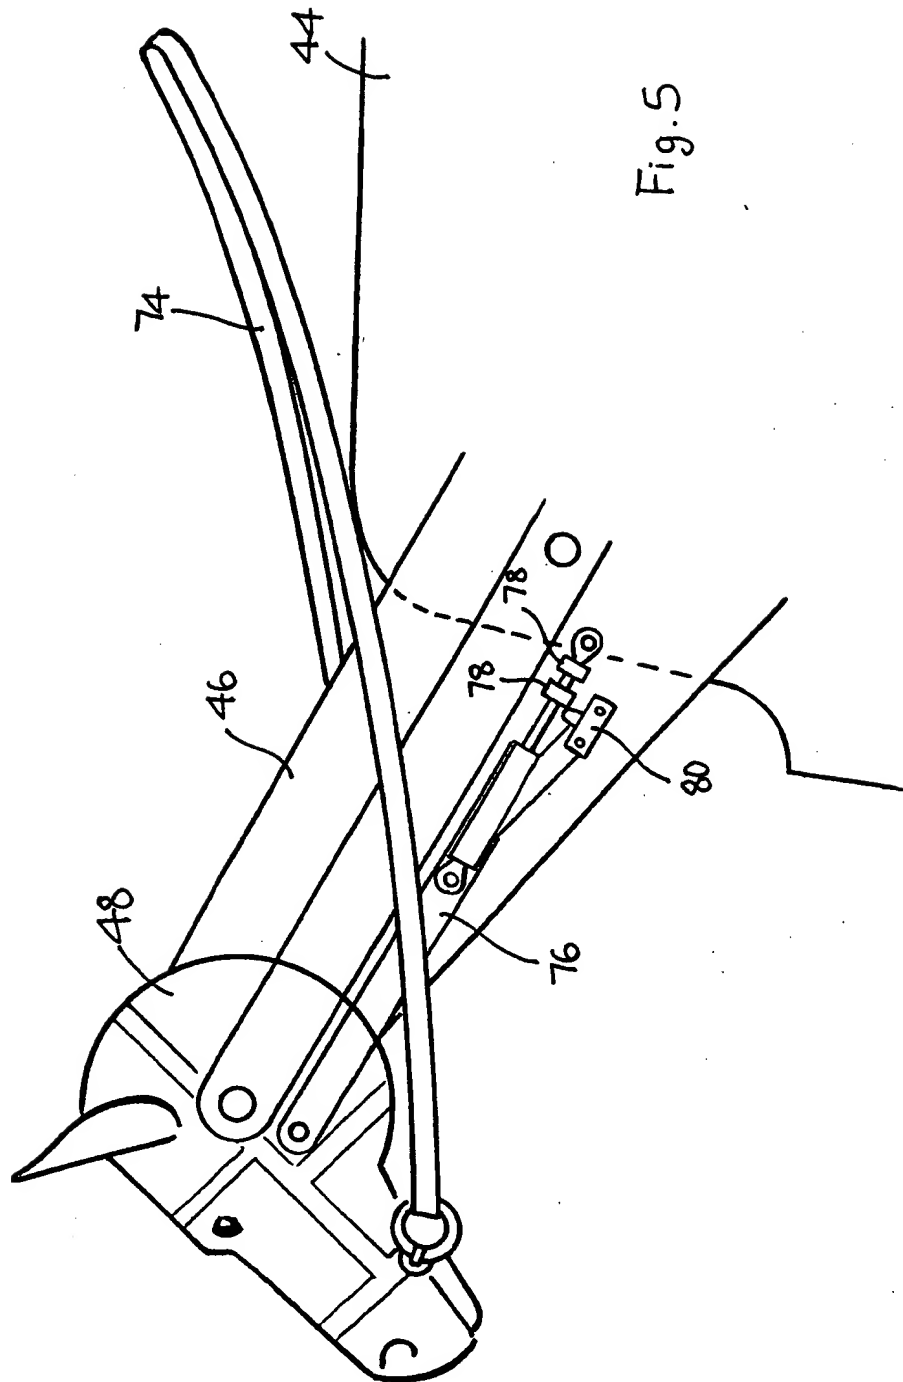


Fig. 5